


### NITROGEN DEMAND PATTERNS

Where the consumption rate as a function of time is essentially constant, a PSA nitrogen system is an excellent fit for a steady flow pattern. The PSA unit size can easily be matched to the measured or estimated consumption rate. Furthermore, nitrogen production will be most economical if the unit operates continuously near or at its full capacity.

A PSA system is not a good fit for processes with periodic flow pattern, where flow is characterized by peaks and valleys as a function of time. An onsite generator with such variable consumption, particularly if it is sized for a peak flow, will operate at partial capacity or idle for a significant amount of time. This will result in high operating costs and operational inefficiency. However, if the duration of the valleys is short, a PSA combined with a large product buffer tank may be sufficient. A PSA system can be sized to handle most of the nitrogen requirements, supplemented with liquid nitrogen during peak-demand periods.

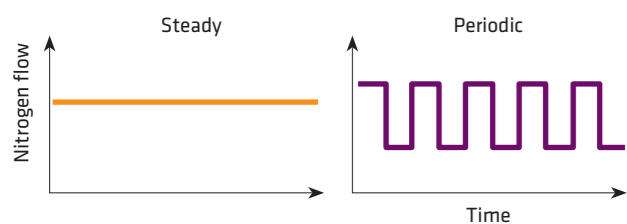

### USING NITROGEN SAFELY

Nitrogen is nontoxic and largely inert gas and that is why it is often mistakenly considered harmless. Notwithstanding by displacing oxygen in air to levels below those required for survival, nitrogen can act as an asphyxiate medium.



#### CMS fixation

High quality carbon molecular sieve ensure long service interval. Molecular sieve is also protected from unexpected liquid intake.

Carbon molecular sieve material is fixed in the column to prevent fast aging and inconveniently dusting. Adsorbent is also protected from unexpected liquid intake.

#### Controller

Robust SIEMENS PLC assures reliable and stable operation and offers variety of settings. The controller is equipped with LCD display which provides all the necessary information about the operation.

#### Oxygen sensors

Two types of high quality oxygen sensors are available as an option:

- zirconia sensors have fast response and high accuracy at low oxygen concentration.
- electrochemical sensors are appropriate for lower purities of the nitrogen.

#### High efficiency inlet and outlet filters

Standard version of N-GEN generators are equipped with high efficiency filters. Super fine coalescing filters at the inlet prevents contamination of the adsorbent material while a dust filter at the outlet intercepts the dust generated by the process.

### NITROGEN USE BY PURITY

PSA can produce nitrogen at various range of purities. The lower the purity, the lower is the cost of nitrogen production. For example, the quality of vegetable oil can be maintained by blanketing with 99,5% nitrogen purity. Normal nitrogen purity for food processing is in the range from 99% to 99,5%. Lower purity nitrogen in the range from 96% to 99% is often used in fire and explosion prevention. High purity with nitrogen content from 99,9% to 99,999% is typically used for laser cutting, electronics soldering and pharmaceutical applications.

Use of the nitrogen	Purity of the N <sub>2</sub>
Food processing: - Wine blanketing - Beer dispense - Oil sparging - Fruit storage	99,0 % to 99,9 %
Fire prevention	95 %
Explosion prevention	98% to 95 %
Chemical blanketing	99 % to 95 %
Pressure testing	95 %
Injection molding	99 % to 99,5 %
Electronic soldering	99,95 % to 99,995 %
Laser cutting	99,95 % to 99,995 %
Pharmaceutical	99,95 to 99,999 %

# OMEGA AIR Air and Gas Treatment



OMEGA AIR d.o.o. Ljubljana

T +386 (0)1 200 68 00  
F +386 (0)1 200 68 50

info@omega-air.si

Cesta Dolomitskega odreda 10  
SI-1000 Ljubljana, Slovenia  
www.omega-air.si



550284 - 09/2017

# N-GEN Nitrogen generators





### NITROGEN

Nitrogen is an inert gas that is suitable for a wide range of applications, covering various aspects of chemical manufacturing, processing, handling, and shipping. Nitrogen has low reactivity and it is excellent for blanketing and is often used as purging gas. It can be used to remove contaminants from process streams through methods such as stripping and sparging. Due to its properties it can be used for protection of valuable products against harmful contaminants. It also enables safe storage, usage of flammable compounds and can help prevent combustible dust explosions.

### GENERATING NITROGEN GAS

Industrial nitrogen gas can be produced by either separation of gaseous air using adsorption (PSA) or fractional distillation of liquefied air using cryogenic methods.

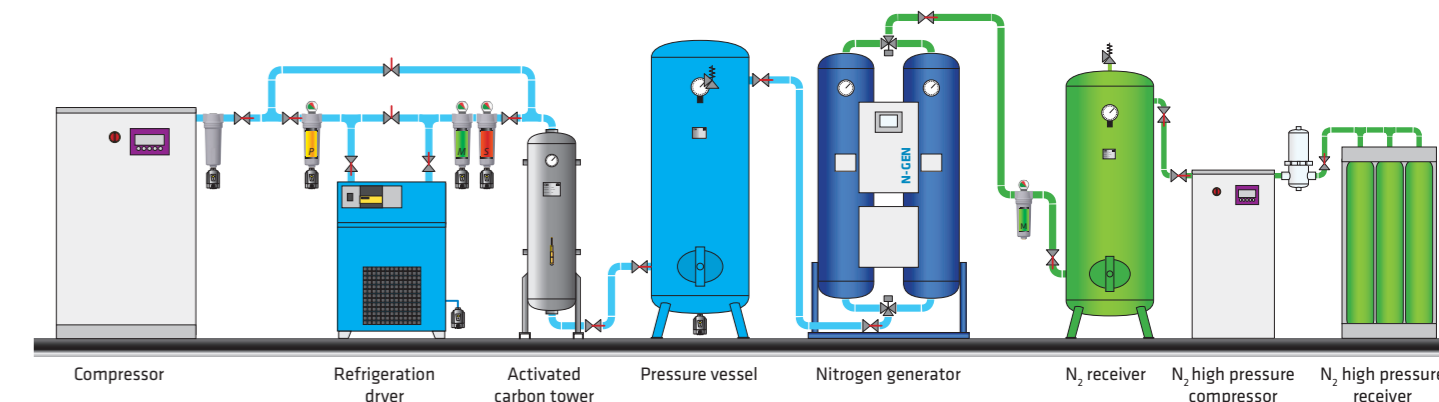

#### Nitrogen basics

- Inert, Colourless, Odourless, Tasteless Gas
- Nitrogen does not enter in chemical reactions
- Nitrogen prevents oxygen access

#### Applications

- Blanketing of Chemicals
- Pharmaceuticals
- Gas Assisted Injection Moulding (GAIM)
- Heat Treatment of Ferrous & Non-Ferrous Metals
- Inerting of Flammable Liquids
- Laser Cutting
- Prevention of Dust Explosions
- Re-flow and Wave Soldering of PCBs
- UV-Curing of Coatings
- Food processing

#### Processes

- Prevention of oxidation of metals, polymers and chemicals,
- For bacteriological growth (foodstuffs & beverage)
- Reduces the risk of combustion and explosion (chemicals, reactions, processes)
- Source of Nitrogen  
LIN = Liquid Nitrogen,  
GAN = Gaseous Nitrogen

#### High quality valves


Our generators are equipped with long life angled seated valves which are important due to high switch count. High flow valves have wide range of piston type actuators for maximum performance at minimum pressure.

### PRESSURE SWING ADSORPTION

The first step in the PSA process is compressed air passing through a combination of filters and an activated carbon tower with the purpose of removing dust, entrained oil and water. The purified air is then directed to one of two adsorption vessels that are packed with carbon molecular sieves (CMS). The remaining impurities such as carbon dioxide and residual moisture are adsorbed by the CMS at the entrance of the adsorbent bed.

When the CMS is at high pressure, it selectively adsorbs oxygen, allowing nitrogen to pass through it at the desired purity level. While one vessel is at high pressure to produce nitrogen, the second vessel is depressurized to remove the adsorbed oxygen, which is then vented to the atmosphere. The automatic switching between adsorption and desorption between the two beds enables the continuous production of nitrogen. By adjusting the size of the air compressor and adsorption vessels containing the CMS, a large range of flow and purity combinations can be met. PSAs can economically produce nitrogen gas at flowrates from less than one cubic meter per hour to greater than a few thousand cubic meter per hour at purities ranging from 96% to 99.999%.

## Components

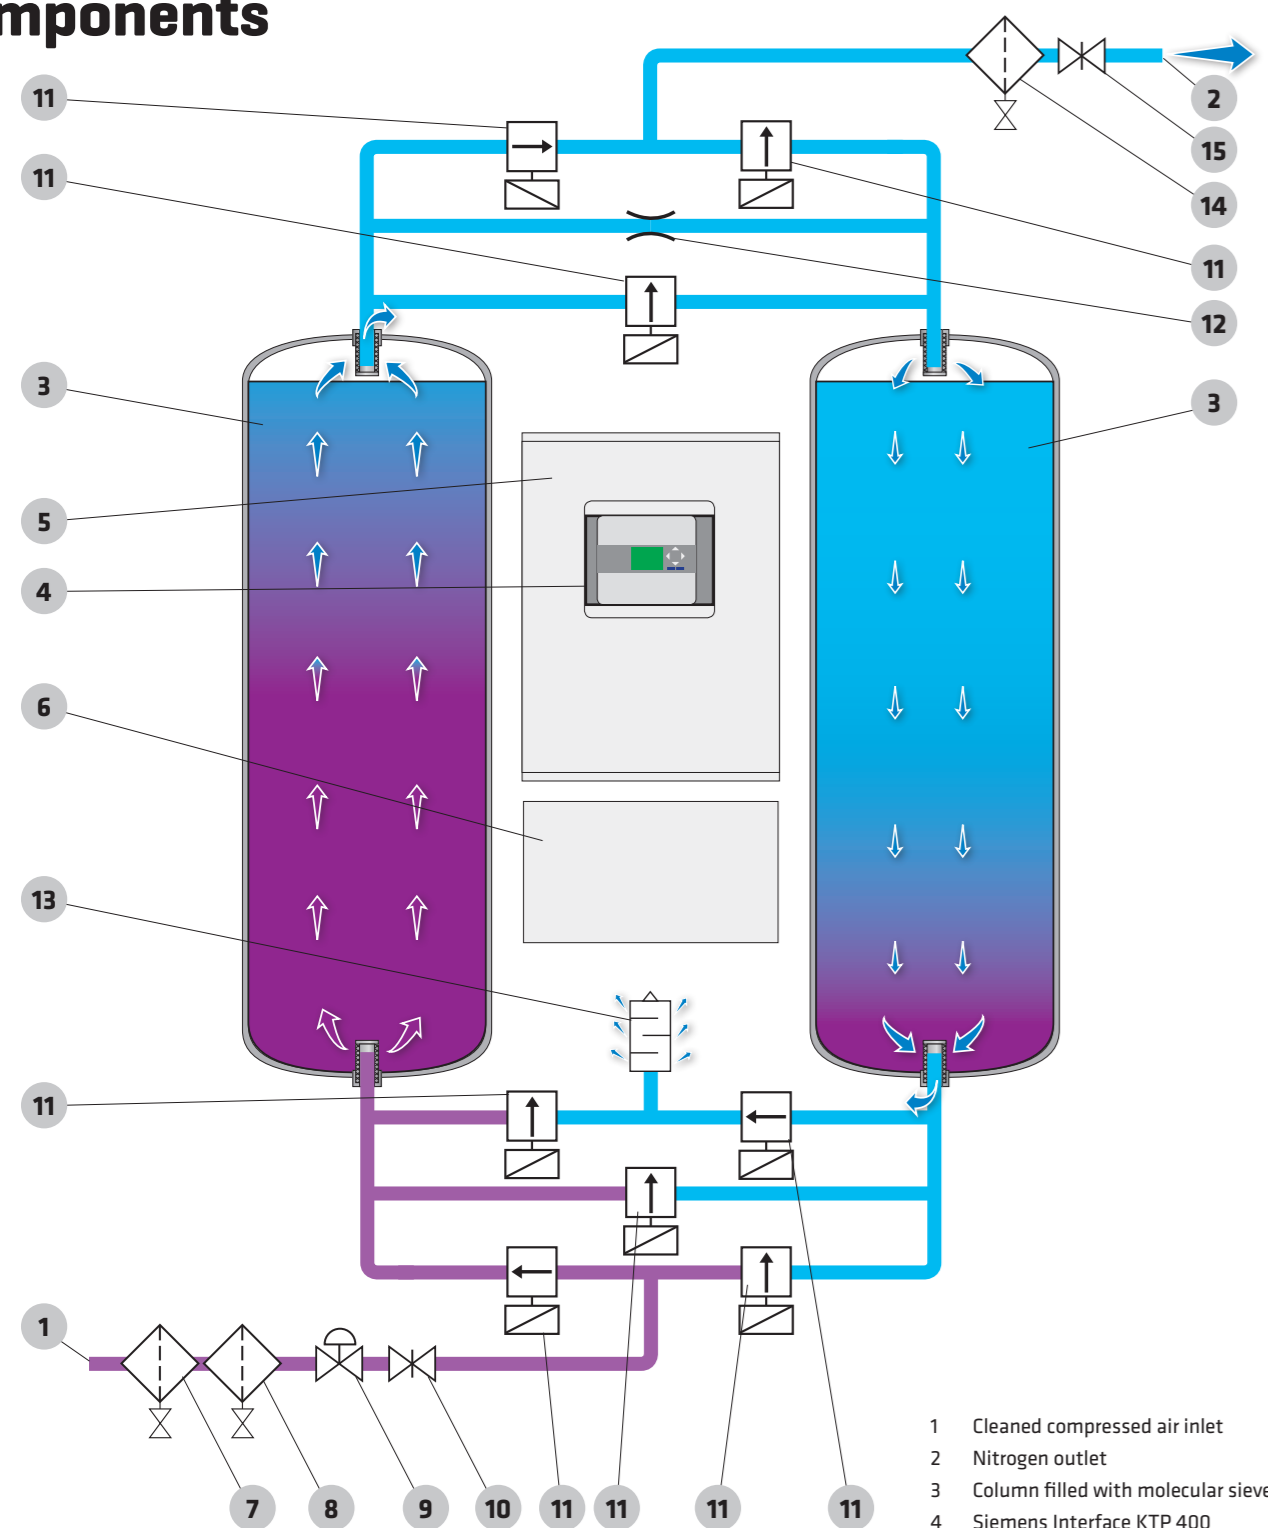

- 1 Cleaned compressed air inlet
- 2 Nitrogen outlet
- 3 Column filled with molecular sieve
- 4 Siemens Interface KTP 400
- 5 Electrical cabinet
- 6 Pneumatic cabinet
- 7 Microfilter
- 8 Activated carbon filter
- 9 Pressure regulator
- 10 Compressed air flow regulator
- 11 Angle seated valve with pneumatic actuator
- 12 Purge nozzle
- 13 Exhaust silencer
- 14 Prefilter
- 15 Nitrogen flow regulator

The N-GEN nitrogen generators extract the available nitrogen in the compressed ambient air from the other gases by applying the Pressure Swing Adsorption (PSA) technology.

During the PSA process compressed, cleaned compressed air is led to a molecular sieve bed, which allows the nitrogen to pass through as a product gas, but adsorbs other gases. The sieve releases the adsorbed gases to the atmosphere, when the outlet valve is closed and the bed pressure returns to ambient pressure.

Subsequently the bed will be purged with nitrogen before fresh compressed air will enter for a new production cycle. In order to guarantee a constant product flow NG nitrogen generators use two molecular sieve beds, which alternatively switch between the adsorption and the regeneration phase.

## How generator works?

- Generator contains two vessels with adsorbing sieve material:
- As the high pressure air enters the first vessel, it moves through the sieve, and the oxygen is adsorbed.
  - Nitrogen is then channeled to a buffer tank.
  - Directly before the first vessel is completely saturated, the feed air is redirected to move through to the second vessel, where the same process occurs.
  - Once that process is complete, the first nitrogen generator vessel is vented out to the atmosphere, allowing the waste gas to release from the sieve.
  - Completing regeneration of the first vessel requires purging it with a small amount of process gas.

## Oxygen sensors

Omega Air generators are equipped with two types of oxygen sensors; zirconia and electrochemical. High purity nitrogen generator use a zirconia based sensor. A zirconia oxygen sensor has a very fast response time coupled with extremely accurate readings at low oxygen levels. Zirconia sensors also work exceptionally well in pressurised gas. In addition to all of this, they are incredibly robust and have a long lifespan of over twenty-five thousand hours.


Low purity nitrogen generators use electrochemical based sensors. Electrochemical sensors have a fast response time and accurate reading at higher oxygen concentrations. Electrochemical sensors lifespan is over eighteen thousand hours.

	97 % vol N <sub>2</sub>	98 % vol N <sub>2</sub>	99 % vol N <sub>2</sub>	99.5 % vol N <sub>2</sub>	99.9 % vol N <sub>2</sub>	99.99 % vol N <sub>2</sub>	99.999 % vol N <sub>2</sub>
Zirconia sensors				✓	✓	✓	✓
Electrochemical sensors	✓	✓	✓				



## Energy saving (stand-by)

N-GEN series generators have an option to receive a stand-by signal from the compressor or other compressed air supply. While in the stand-by the air can flow freely through both towers in direction from the inlet to the outlet of the generator. Meanwhile the generator controller is in the stand-by mode and ready to resume with the normal operation as soon as it gets the appropriate signal. The stand-by signal is relayed to the N-GEN generator through a stand-by contact on the controller by a connected switch.

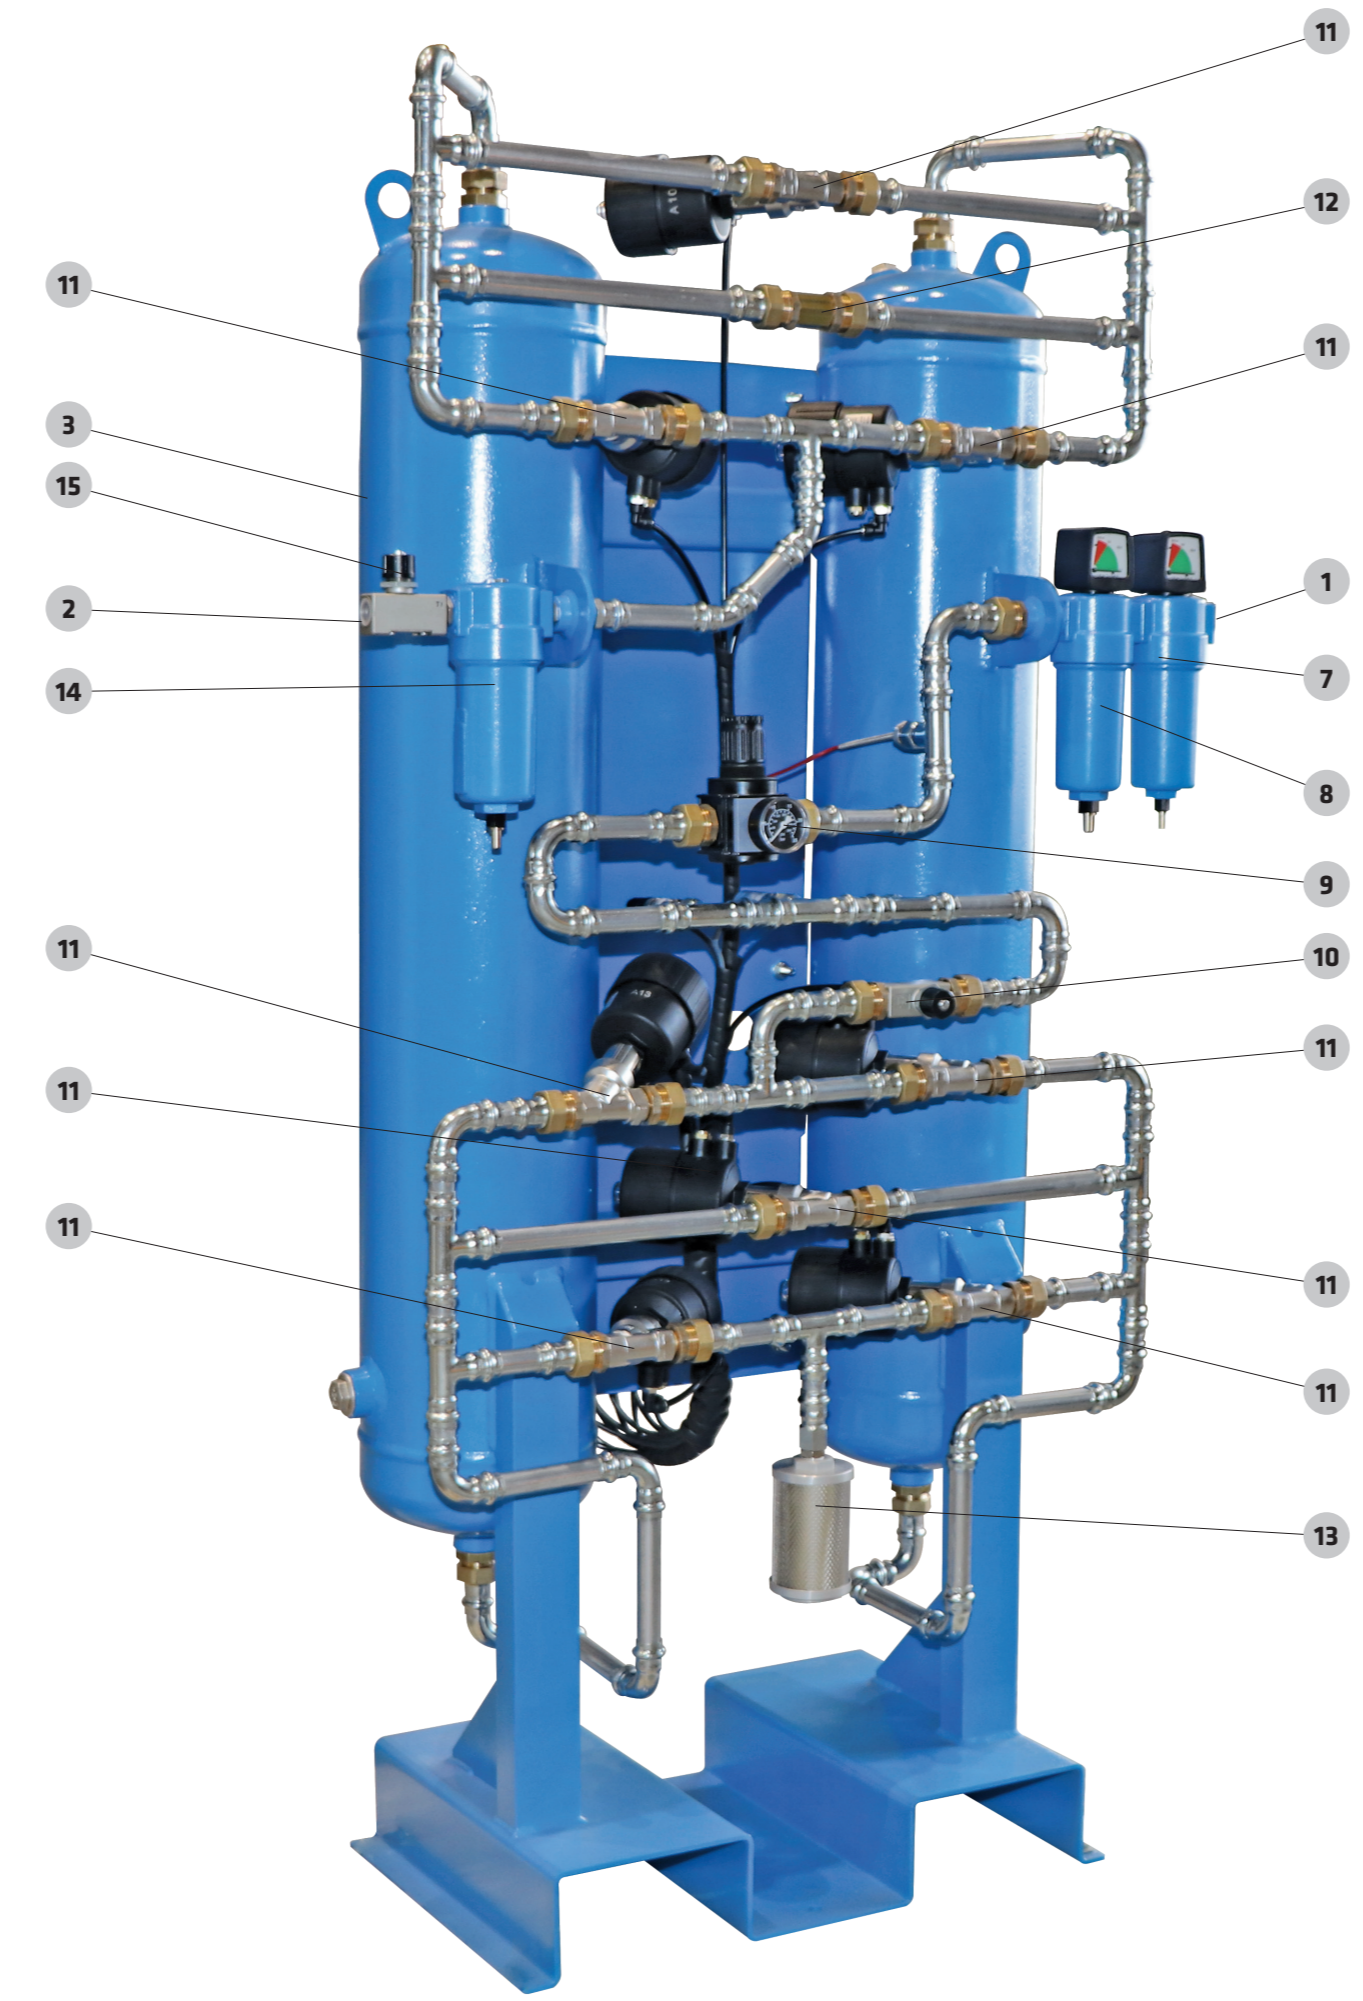


### Standard equipment

- Set of external feed air filters
- Adsorber vessels in carbon steel
- Long life pneumatic valves
- Internal piping & fittings zinc plated carbon steel
- Nitrogen flow regulation
- Control system with SIEMENS PLC
- WebControl

### Optional equipment

- Oxygen analyser with zirconium-oxide sensor
- Electronic product flow meter
- Feed air / product moisture analyser
- Feed air / product pressure transmitters
- Nitrogen sterile filters
- Nitrogen booster
- Nitrogen cylinder filling system

### Dimensions

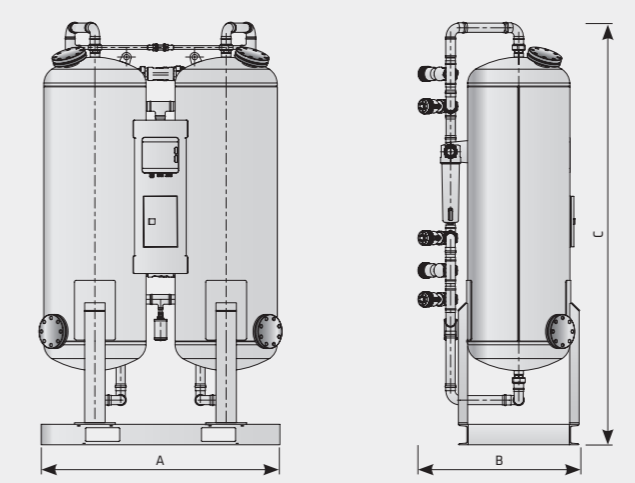

TECHNICAL DATA						
Type	Connection		Dimensions [mm]			Mass kg
	In	Out	A	B	C	
N-GEN 03	1/2"	1/2"	635	530	1650	110
N-GEN 05	1/2"	1/2"	635	530	1650	130
N-GEN 10	1/2"	1/2"	685	530	1650	190
N-GEN 15	1/2"	1/2"	795	545	1655	230
N-GEN 20	1"	1/2"	795	585	1920	295
N-GEN 25	1"	1/2"	845	660	1975	410
N-GEN 35	1"	1/2"	1040	780	2005	585
N-GEN 50	1"	1/2"	1040	795	2250	740
N-GEN 65	2"	1/2"	1150	795	2335	835
N-GEN 100	2"	1"	1425	945	2480	1260
N-GEN 150	2"	1"	1650	1100	2550	1590
N-GEN 200	2"	1"	1805	1160	2615	1905
N-GEN 250	3"	1"	2020	1190	2780	2430
N-GEN 300	2 1/2"	2"	2260	1354	2810	2810
N-GEN 400	3"	2"	2720	1470	2880	3640

PERFORMANCE										
Type		Discharge pressure barg	Discharge pressure barg	Residual Oxygen [vol. %]						
				3	2	1	0,5	0,1	0,01	0,001
				Residual Nitrogen [vol. %]						
				96,00	96,97	97,87	98,17	98,47	- <sup>(1)</sup>	- <sup>(1)</sup>
				Residual Argon [vol. %]						
				1,00	1,03	1,13	1,33	1,43	- <sup>(1)</sup>	- <sup>(1)</sup>
				Total inert gas purity [vol. %]						
				97	98	99	99,5	99,9	99,99	99,999*
N-GEN 03	N <sub>2</sub> flow [Nm <sup>3</sup> /h]	7,5	6,2	5,23	4,27	3,62	3,00	1,99	0,99	0,61
N-GEN 05	N <sub>2</sub> flow [Nm <sup>3</sup> /h]	7,5	6,2	9,0	7,4	6,2	5,2	3,4	1,7	1,1
	Feed air consumption [Nm <sup>3</sup> /h]			23,2	21,0	19,7	18,0	14,5	10,5	9,5
N-GEN 10	N <sub>2</sub> flow [Nm <sup>3</sup> /h]	7,5	6,2	15,2	12,4	10,5	8,7	5,8	2,9	1,8
	Feed air consumption [Nm <sup>3</sup> /h]			38,9	35,3	33,0	30,2	24,3	17,6	15,9
N-GEN 15	N <sub>2</sub> flow [Nm <sup>3</sup> /h]	7,5	6,2	24,1	19,7	16,7	13,8	9,2	4,6	2,8
	Feed air consumption [Nm <sup>3</sup> /h]			61,8	56,1	52,5	48,0	38,6	28,0	25,3
N-GEN 20	N <sub>2</sub> flow [Nm <sup>3</sup> /h]	7,5	6,2	30,2	24,6	20,9	17,3	11,5	5,7	3,5
	Feed air consumption [Nm <sup>3</sup> /h]			77,3	70,3	65,6	60,1	48,3	35,1	31,6
N-GEN 25	N <sub>2</sub> flow [Nm <sup>3</sup> /h]	7,5	6,2	42,7	34,8	29,5	24,5	16,2	8,1	4,9
	Feed air consumption [Nm <sup>3</sup> /h]			109,4	99,4	92,8	85,0	68,4	49,6	44,7
N-GEN 35	N <sub>2</sub> flow [Nm <sup>3</sup> /h]	7,5	6,2	67,4	55,0	46,6	38,6	25,6	12,8	7,9
	Feed air consumption [Nm <sup>3</sup> /h]			172,7	156,9	146,6	134,2	107,9	78,3	70,6
N-GEN 50	N <sub>2</sub> flow [Nm <sup>3</sup> /h]	7,5	6,2	87,4	71,3	60,4	49,9	33,2	16,6	10,2
	Feed air consumption [Nm <sup>3</sup> /h]			224,0	203,5	190,1	173,4	140,0	101,6	91,6
N-GEN 65	N <sub>2</sub> flow [Nm <sup>3</sup> /h]	7,5	6,2	111,9	91,4	77,4	64,2	42,6	21,2	13,1
	Feed air consumption [Nm <sup>3</sup> /h]			286,9	260,6	243,5	223,0	179,3	130,1	117,3
N-GEN 100	N <sub>2</sub> flow [Nm <sup>3</sup> /h]	7,5	6,2	192,9	157,5	133,5	110,6	73,4	36,6	22,5
	Feed air consumption [Nm <sup>3</sup> /h]			494,5	449,3	419,7	384,4	309,1	224,3	202,2
N-GEN 150	N <sub>2</sub> flow [Nm <sup>3</sup> /h]	7,5	6,2	259,4	211,8	179,5	148,7	98,7	49,1	30,2
	Feed air consumption [Nm <sup>3</sup> /h]			664,9	604,1	564,3	516,9	415,6	301,6	271,9
N-GEN 200	N <sub>2</sub> flow [Nm <sup>3</sup> /h]	7,5	6,2	354,3	289,2	245,0	203,1	134,8	67,2	41,3
	Feed air consumption [Nm <sup>3</sup> /h]			907,9	824,8	770,6	705,8	567,5	411,8	371,3
N-GEN 250	N <sub>2</sub> flow [Nm <sup>3</sup> /h]	7,5	6,2	434,1	354,4	300,3	248,9	165,1	82,3	50,6
	Feed air consumption [Nm <sup>3</sup> /h]			1112,6	1010,8	944,3	864,9	695,4	504,6	455,0
N-GEN 300	N <sub>2</sub> flow [Nm <sup>3</sup> /h]	7,5	6,2	/	/	520,5	344,8	220,4	155,5	87,9
	Feed air consumption [Nm <sup>3</sup> /h]			/	/	1155,5	985,0	965,7	840,4	675,4
N-GEN 400	N <sub>2</sub> flow [Nm <sup>3</sup> /h]	7,5	6,2	/	/	533,8	442,5	293,6	146,3	90,0
	Feed air consumption [Nm <sup>3</sup> /h]			/	/	1678,8	1537,6	1236,3	897,1	808,9

\* On request  
<sup>(1)</sup> For concentrations at higher purity please contact manufacturer.  
 All flow rates valid for generator operation at ambient conditions 20 °C, 1.013,25 mbar and 60% RH.  
 Performance ±5%.